


Dry Barrel Fire Hydrant

Model No.:MH-1510



Technical Specifications:

- 1.Design Standard AWWA C502
- 2.Nominal Pressure 250PSI
3. One pumper nozzle, 4.5-4NH thread.Two hose nozzles, 2.5-7.5NH threads Other kinds of threads are available
- 4.Mechanical connector AWWA/ANSI C153/A21.53 6"

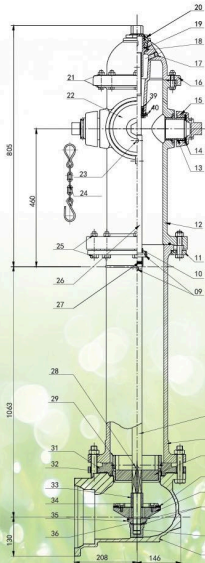

40	Bolt	2	304	ASTM A240
39	Screw Stem Bushing	1	304	ASTM A240
38	100 Cover Gasket	1	EPDM	Figure not shown
37	100 Connector	1	C83600	ASTM B62
36	Cheek Turn Gasket	1	Gr.B	ASTM A283-B
35	Locking Nut Seat	1	DI	
34	Platen	1	DI	
33	Annular Tubes	1	1045	ASTM A29/29M
32	Bolt- Nut	8	1035	ASTM A29/29M
31	Seat Fixing Plate	1	DI	
29	Seat	1	C83600	ASTM B62
28	Pressure Relief Valve	1	C83600	ASTM B62
27	Cushion Rubber	1	EPDM	
26	Screw Stem	1	1045	ASTM A29/29M
25	Bolt- Nut	8	1035	ASTM A29/29M
24	Cover Chain	3	Gr.B	ASTM A283-B
23	Cylindrical Pin	1	1045	ASTM A29/29M
22	100 Cover	1	DI	
21	Bolt- Nut	8	1035	ASTM A29/29M
20	Screw Nut Seat	1	C83600	ASTM B62
19	Screw Nut Gasket	1	C83600	ASTM B62
18	Screw Stem Nut	1	C83600	ASTM B62
17	Thread Plug	1	C83600	ASTM B62
16	Upper End Cover	1	DI	
15	65 Cover	2	DI	
14	65 Cover Gasket	2	EPDM	
13	65 Connector	2	C83600	ASTM B62
12	Main Body On Ground	1	DI	
11	Clamp For Connection Tube	1	DI	
10	Connecting Rod Sleeve	1	1045	ASTM A29/29M
09	Perforated Cylindrical Pin	2	1045	ASTM A29/29M
08	Connecting Cylinder	1	DI	
07	Guid Bracket	1	C83600	ASTM B62
06	Sealed Rubber Sheet	1	EPDM	
05	Tray	1	DI	
04	Locking Nut Gasket	1	EPDM	
03	Connecting Rod	1	1045	ASTM A29/29M
02	Locking Nut	1	DI	
01	Mechanical Connector	1	DI	
NO.	Name	Qty.	Material	Remark