

PRESSURE RESTRICTING ANGLE VALVE

WITH HYDROLATOR; FEMALE NPT INLET X FEMALE NPT OUTLET

MODEL LVPRVA








EX26977




FEATURES:

300 lb (2070 KPa) pressure tested approved valve. Heavy Duty 1-1/2" (38 mm) pressure restricting angle hose and hydrolator valve. Automatically drains and vents, safeguarding against hose deterioration. O-ring packing and red cast handle. Forgeline Bonnett and Seat Assembly. Water pressure is controlled by adjustable flow restriction. If full flow is required, the restriction may be overridden. Furnished with field setting chart. Contains lead. Not for use in water systems intended for human consumption.

• SIZE: 1½" F x FNST 2 ½" M x FNST 2 ½" M x FYFD

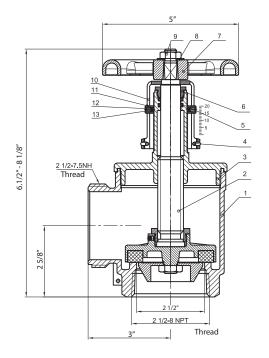



PRESSURE RESTRICTING ANGLE HOSE VALVE				
ITEM	PART	QTY	MATERIAL	
1	Body	1	C37700	
2	Spool Assembly	1		
3	Bonnet	1	C37700	
4	Wire	1	304	
5	O-Ring	2	EPDMA (A70)	
6	Gland Nut	1	C37700	
7	Wheel	1	ZL102	
8	Washer	1	304	
9	Wheel Nut	1	C37700	
10	Set Numbers	1	C37700	
11	Collar	1	C37700	
12	Set Screw	2	304	
13	Washer	1	PA6	

*Contact Lansdale for UL/FM listings

PROJECT	APPROVAL STAMP
PROJECT:	☐ APPROVED
ADDRESS:	☐ APPROVED AS NOTED
ENGINEER:	□ NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

Revision: 1/2023