FSB 35 Fire-Safe Direct Mount 3-Piece

Full Port Ball Valves

¼" – 4" (DN8 – DN100)
2000 psi (PN140)



FIRE-SAFE ANTI-STATIC 2014/68/EU SAFETY

Strong & Reliable

With the increasing demand of fire-safe ball valves, DIE ERSTE is proud to introduce the new Series FSB 35 Ball Valves. FSB 35 ball valves are most suitable where operational perfection is needed, especially in the event of a fire. DIE ERSTE FSB 35 ball valves assure bubble tight sealing and zero leakage in high pressure and fire conditions.

Series FSB 35 has been approved to API 607 4th Edition, with the combination of graphite sealing, secondary fire-safe contact, anti-static stem, and strong body bolts, Series FSB 35 ball valves offer secondary sealing for superior sealing effects. In high pressure condition, two sets of sealing rings are used to prevent leakage. In fire condition, the secondary sealing rings become the main sealing elements after the PTFE seats have been burnt away.

Anti-static devices are also installed on the stem. During the ball valve operation, static charge wight build up between ball and seat, andcan be potentially dangerous with inflammable fluids. To solve the problem, small metal ball and spring are used to discharge the static and maintain the electric continuity.

Instead of four long body bolts in the conventional three piece ball valves, FSB 35 ball valves use eight strong body bolts to secure connections between center piece and two side caps. For larger sizes, twelve body bolts are used. The tensile body bolts are screwed into the center piece for maximum closure, and also prevent expansion of the bolts.

(A) ISO5211 Actuator Direct Mount
Square stem and twin ISO 5211 pattern mounting pad allow for easy actuator installation without bracket and adaptor.


(B) Stem Packing
Self-adjusting stem packing assembly with Belleville washers for temperature variation, vibration, and security. In FSB ball valves, graphite stem packing is used to prevent leakage through stem.

(C) Blowout-Proof Stem
The stem is inserted from inside the body bore. This particular design prevents the stem from shooting out when there is excess pressure in the bore caused by high temperature heat.

(D) Anti-Static Device
All FSB ball valves are equipped with Anti-static Device in the ball bore. This device provides a grounding path between the valve body and the ball for static electric charges.

(E) Body Bolts
The hinge on the central body provides the alignment of body to the end connection. In FSB ball valves, eight body bolts are screwed into the body to secure the valve structure in high pressure environment. Twelve bolts are used for larger sizes of Series FSB 35 ball valves.


(F) End Connection
The Series FSB 35 ball valve is available with threaded end, butt-welding, socket-welding. Other connection type is available upon request.

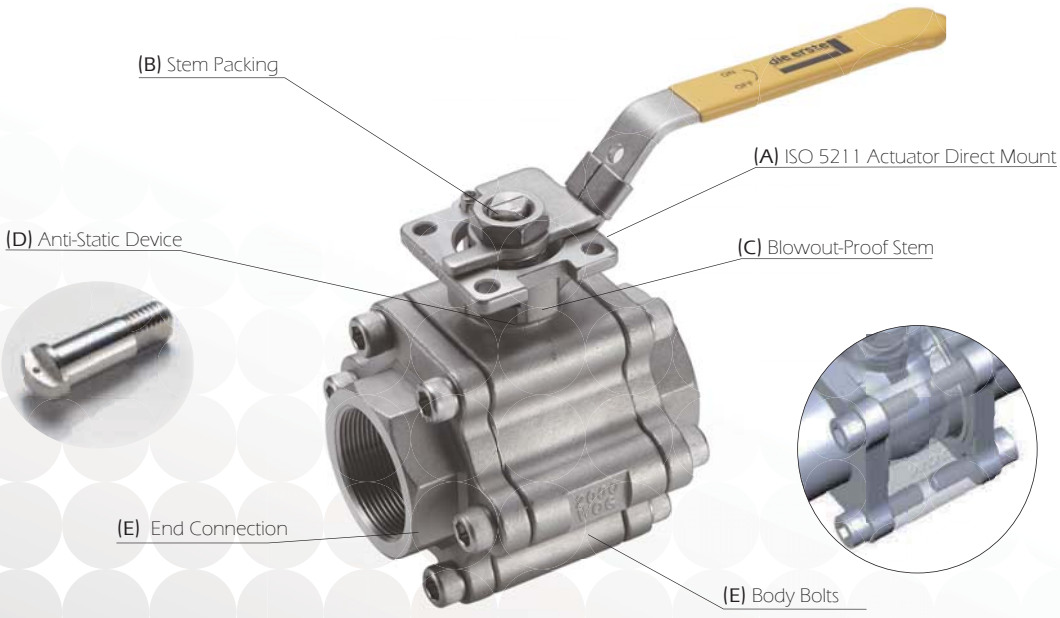


Fire-Safe Design

Fire-Safe Contact Surface

The end cap is specially designed and machined precisely to fit with the valve ball surface. During the event of fire, the soft ball seat may disintegrate in high temperature due to the nature of the material. Thus, the valve ball comes into contact with the fire-safe contact surface and forms a secondary metal-to-metal seal. The downstream flow pushes the floating ball to the side, and effectively seals the bore.

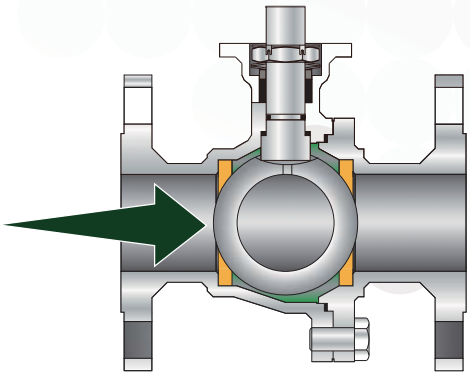

Before a fire

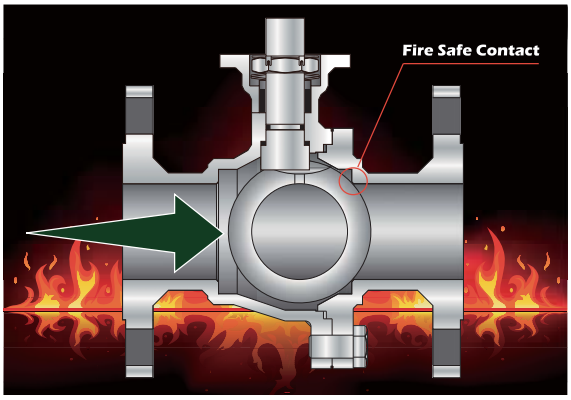

After a fire



Seals and Packings

Graphite Stem Seals and Packing

With the high temperature resistance property, graphite becomes the perfect material of choice for sealing parts. The graphite sealing rings are enclosed in a compartment and will not be in touch with the fluid. Therefore, regardless of the temperature and pressure, graphite seals stay immobile and continuously prevent leakage from or into the joined parts while under compression.

Dual Body Seal

Series FSB 35 ball valves utilize two sets of body seals to prevent leakage. The inner body seal which are made with PTFE, for the purposes of avoiding graphite contamination in the fluid, though the chances are rare. The outer body seal is made with graphite material for fire-safe reason. Both seals are securely placed in the groove to avoid movements.

Direct Mounting Pad

The dual ISO direct mounting pad allows precise and flexible mounting of actuator. Usually two sets of mounting holes are drilled for different actuator sizes. With the integrally cast top mounting platform, machined flat surface and square stem, the design ensures correct alignment of the actuator to effectively minimize the side-loading during high cycle or continuous duty applications. The well-supplied (air or electric power) actuation equipments can be removed safely and easily while the valve is under the line pressure.





Direct Mount with Actuators

CE Marking CE 0035

The whole series of ball valves is approved according to European Directive 2014/68/EU.

Vacuum

Standard Series 35 ball valves, can be rated to hold in part of the "Medium Vacuum" range to 52 TORR (mm of Hg) or 52000 microns in temperature ratings from -4°F to 350°F (-20°C to 180°C). Here only PTFE seats and seals are highly recommended for this vacuum service. Please consult with us for a customizing solution.

Size Range

1/4"~4" (DN8~DN100)

Standards

ASME B16.34, B16.25, B1.20.1
API 607, API6D, API 598
ISO 5211, ISO 5209, ISO 228-1, ISO 7-1, ISO 261, ISO 10497
DIN EN 10204, DIN 259/2999, DIN EN 10226
MSS SP-25, MSS SP-72
BS 5351

Marine Application

Casting from Lloyd's or DNV approved foundry available upon request.

Certifications of Series FSB 35:

API 607 Fire Test or Soft Seated Quarter Turn Valves

Canadian Registration Number

ATEX Directive 2014/34/EU Explosive Prevention

Low Emmision Certificated
TA-Luft 2002, Sec. 5.2.6.4
VDI 2440 2000, Sec. 3.3.1.3
Please inquire

SIL3 Capable
Please inquire



Pressure Rating:

2000 psi WOG (PN140)
150 psi (10 bar) with saturation steam

Temperature Range:

- -4°F to 392°F (-20°C to 200°C) with Cabon Filled Seat
- -4°F to 350°F (-20°C to 180°C) with RPTFE seat
- -4°F to 350°F (-20°C to 180°C) with PTFE seat


End Connection:


- Female threaded to NPT, DIN 259/2999, and BS standards
- Butt-welding ends Sch80
- Socket-welding ends

Body Material:

ASTM CF8M, CF8, WCB
DIN 1.4408. 1.4308, 1.0619

Pressrue and Temperature Rating

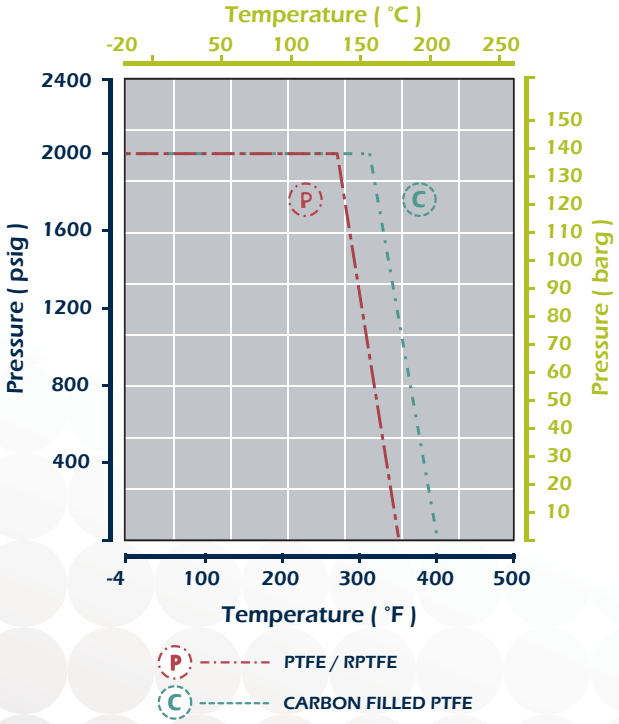

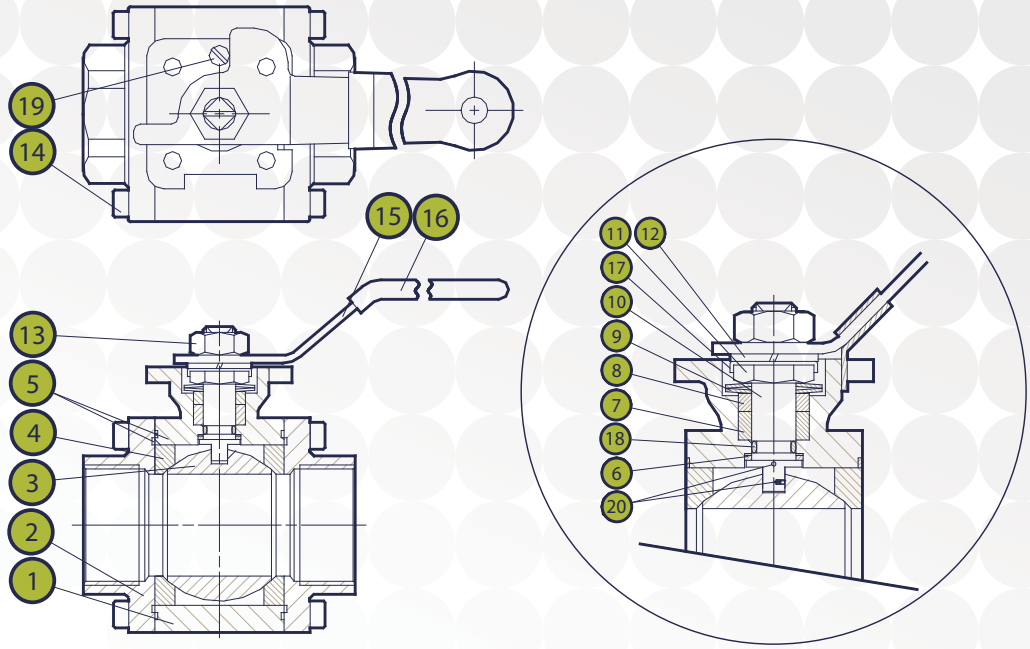

NO	PART NAME	MATERIAL
1	BODY	CF8M / WCB
2	CAP	CF8M / WCB
3	BALL	CF8M / CF8
4	BALL SEAT	TFM 1600 RPTFE 15% RPTFE 25% PTFE
5	BODY SEAL	PTFE & GRAPHITE
6	THRUST WASHER	PTFE & GRAPHITE
7	STEM PACKING	GRAPHITE
8	GLAND	SS 304
9	BELLEVILLE SPRING	SS 301
10	STEM	SS 316 / SS 304

NO	PART NAME	MATERIAL
11	NUT	SS 304
12	SPRING WASHER	SS 304
13	NUT	SS 304
14	BOLT	A2-70 / ISO 898-1 12.9
15*	HANDLE	SS 304 / Zinc PLATED STEEL
16	HANDLE SLEEVE	VINYL
17	LOCK SADDLE	SS 304
18	O-RING	VITON
19	STOP PIN	SS 304 / ISO 898-1 12.9
20	ANTI-STATIC	SS 316

***Round bar handle is provided for size 4" (DN100)**

Size		Cv	Kv
inch	DN		
1/4"	8	6.3	5.4
3/8"	10	6.2	5.4
1/2"	15	20.9	18.1
3/4"	20	49.4	42.7
1"	25	81	70.1
1¼"	32	127.9	110.6
1½"	40	191.5	165.7
2"	50	376	325.2
2½"	65	642	555.3
3"	80	901	779.4
4"	100	1588	1373.6


The left table represents the Flow Coefficients (CV) and Flow Factor (Kv) for DIE ERSTE Series FSB 35 ball valves. This number represents the volume of water at 60°F that will flow in US gallon per minute through a valve with a 1 lb/in^2 pressure drop across in the full open position. For Kv, it is the flow of water with temperature from 5°C - 30°C in cubic meters per hour (m^3/h) with a pressure drop of 1 bar.

$$Cv = F\sqrt{\frac{SG}{\Delta P}}$$

The Cv value is dependent on flow rate, pressure drop, specific gravity. The larger the Cv value, the easier the fluid will flow within the valve. However, Cv value is easily affected by various factors, such as fluid type, fluid viscosity, saturated steam pressure.

Dimensions inch/mm

SIZE inch DN	d	L	L_1	H	W	H1	H2	S	d2	d3	d4	C	ISO 5211	Weight lbs Kg
1/4 "	0.4	2.55	2.75	2.75	5.51	1.47	0.31	0.35	0.56	0.31	0.54	0.39	F04	2.2
8	11	65	70	70	140	37.5	8	9	14.2	7.8	13.8	10		1
3/8 "	0.43	2.55	2.75	2.75	5.51	1.47	0.31	0.35	0.69	0.43	0.68	0.39	F04	2.2
10	11	65	70	70	140	37.5	8	9	17.6	10.8	17.3	10		1
1/2 "	0.55	2.95	2.95	2.75	5.51	1.47	0.31	0.35	0.86	0.56	0.85	0.51	F04	2.43
15	14	75	75	70	140	37.5	8	9	21.8	14.3	21.7	13		1.1
3/4 "	0.81	3.14	3.54	3.54	7.08	1.97	0.43	0.43	1.07	0.78	1.07	0.59	F04 F05	2.65
20	20.5	80	90	90	180	50	11	11	27.2	19.7	27.2	15		1.2
1 "	1.00	3.54	3.93	3.93	7.08	2.36	0.43	0.43	1.33	0.98	1.34	0.59	F04 F05	4.63
25	25	90	100	100	180	60	11	11	33.9	25	34	15		2.1
1¼ "	1.24	4.33	4.33	4.40	8.46	2.83	0.63	0.55	1.68	1.30	1.68	0.59	F07	7.28
32	31.5	110	110	112	215	72	16	14	42.7	32.9	42.7	15		3.3
1½ "	1.46	4.72	4.92	4.52	8.46	2.99	0.63	0.55	1.92	1.51	1.91	0.63	F07	9.92
40	37	120	125	115	215	76	16	14	48.8	38.4	48.6	16		4.5
2 "	1.97	5.51	5.90	5.23	8.46	3.66	0.63	0.55	2.41	1.95	2.38	0.67	F07	15.87
50	50	140	150	133	215	93	16	14	61.2	49.5	60.5	17		7.2
2½"	2.56	7.28	7.48	6.81	12.99	4.58	0.94	0.86	2.91	2.32	2.87	0.67	F07 F10	29.54
65	65	185	190	173	330	116.5	24	22	73.9	58.9	73	17		13.4
3"	3.15	8.07	8.66	7.24	12.99	5.00	0.94	0.86	3.53	2.90	3.50	0.67	F07 F10	46.3
80	80	205	220	184	330	127	24	22	89.8	73.6	89	17		21
4"	3.94	9.45	10.63	9.53	23.62	6.26	1.14	1.06	4.54	3.82	4.50	0.79	F10	75.84
100	100	240	270	242	600	159	29	27	115.2	97.1	114.3	20		34.4

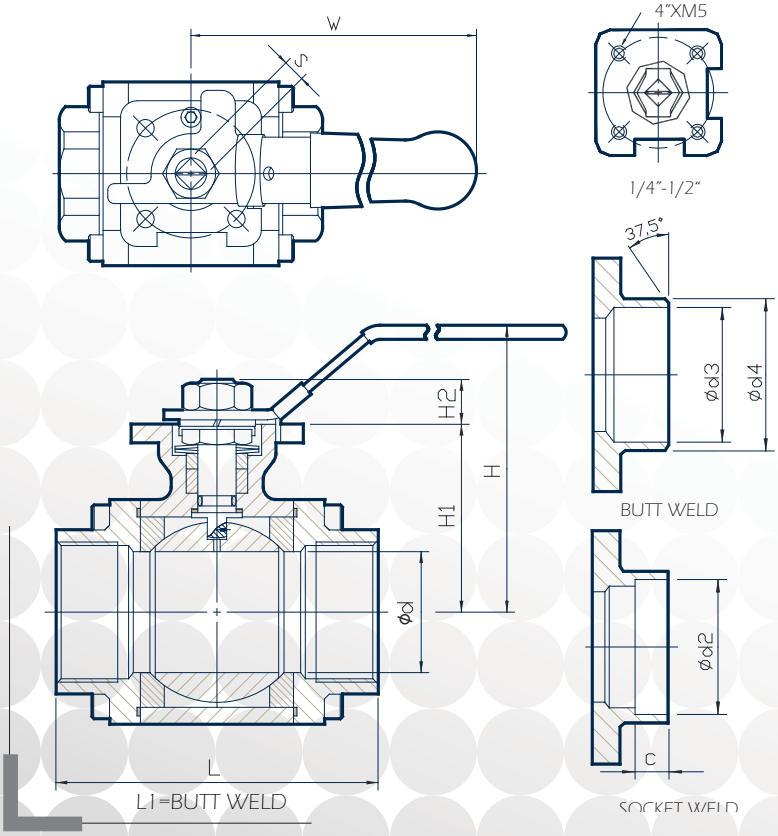


Valve Size		Torque (N.m)	Torque (lbs.in)
inch	DN		
1/4	8	8	70.8
3/8	10	8	70.8
1/2	15	8	70.8
3/4	20	11	97.4
1	25	16	142
1¼	32	23	204
1½	40	33	292
2	50	40	354
2½	65	72	637
3	80	85	752
4	100	160	1416


Note: Torque measured at ambient temperature with no loading; safety factor is not included.


FSB 35-EXT (optional)

To increase ease of actuator mounting for small-sized ball valves, FSB 35-EXT option has been created with extended length between body and mounting pad.

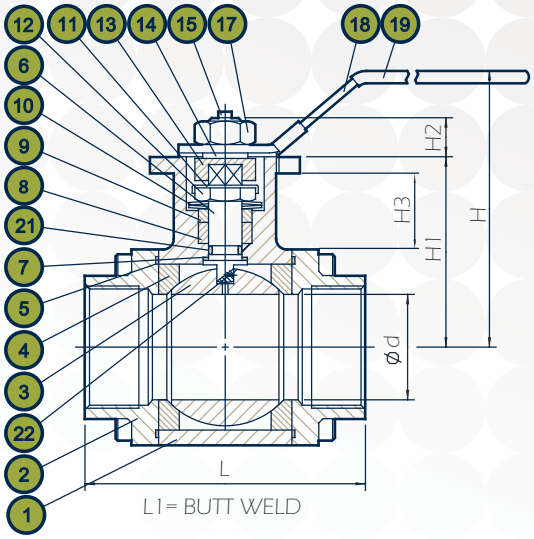


L1= BUTT WELD

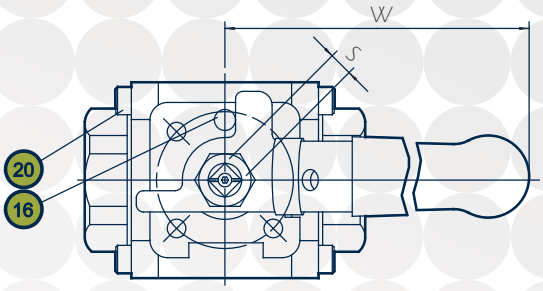



BUTT WELD



SOCKET WELD

NO	PART NAME	MATERIAL
1	BODY	CF8M / WCB
2	CAP	CF8M / WCB
3	BALL	CF8M / WCB
4	BALL SEAT	TFM 1600 RPTFE 15% RPTFE 25% PTFE
5	BODY SEAL	PTFE / GRAPHITE
6	STEM	SS 316 / SS 304
7	THRUST WASHER	PTFE / GRAPHITE
8	STEM PACKING	GRAPHITE
9	GLAND	SS 304
10	BELLEVILLE WASHER	SS 301

NO	PART NAME	MATERIAL
11	LOCK SADDLE	SS 304
12	GLAND NUT	SS 304
13	COUPLER	CF8
14	COUPLER WASHER	SS 304
15	COUPLER BOLT	SS 304
16	STOP PIN	A2-70 / ISO 898-1 12.9
17	HANDLE NUT	SS 304
18	HANDLE	SS304 / ZINC PLATED STEEL
19	HANDLE SLEEVE	VINYL PLASTISOL
20	BODY BOLT	A2-70 / ISO 898-1 12.9
21	O-RING	VITON
22	ANTI-STATIC DEVICE	SUS 316

Dimensions inch/mm

SIZE inch DN	d	L	L_1	H	W	H1	H2	S	d2	d3	d4	C	ISO 5211	Torque lbs.in N.m
1/4 " 8	0.4 11	2.55 65	2.75 70	3.31 84	5.51 140	2.03 51.5	0.35 9	0.35 9	0.56 14.2	0.31 7.8	0.54 13.8	0.39 10	F04	115 13
3/8 " 10	0.43 11	2.55 65	2.75 70	3.31 84	5.51 140	2.03 51.5	0.35 9	0.35 9	0.69 17.6	0.43 10.8	0.68 17.3	0.39 10	F04	115 13
1/2 " 15	0.55 14	2.95 75	2.95 75	3.31 84	5.51 140	2.03 51.5	0.35 9	0.35 9	0.86 21.8	0.56 14.3	0.85 21.7	0.51 13	F04	115 13
3/4" 20	0.81 20.5	3.14 80	3.54 90	4.09 104	7.08 180	2.52 64	0.43 11	0.43 11	1.07 27.2	0.76 19.4	1.07 27.2	0.59 15	F04 F05	168 19

Note: Torque measured at ambient temperature with no loading;safety factor is not included.



UHMWPE – Ultra High Molecular Weight Polyethylene

Valve Seat Selection

Please contact your sales for more properties of materials




Valve Seat Selection Guide

Seat Code	Description	Temprature Range
VIRGIN PTFE	The most common material of seat ring. With excellent chemical resistance, PTFE can be used almost in all media.	-20°C to 180°C (-4°F to 350°F)
RPTFE (15% GLASS FILLED PTFE)	Similar to PTFE, but offers higher pressure capacity while temperature is increasing. The material itself is harder than conventional PTFE. Please specify the application due to confusion with PTFE.	-20°C to 180°C (-4°F to 350°F)
CARBON FILLED PTFE	Specially used for steam and thermal oil, with low coefficient of friction. The chemical resistance is similar to PTFE and RPTFE. 15% carbon and 25% carbon are provided.	-20°C to 200°C (-4°F to 392°F)
S/S POWDER FILLED PTFE	Combined with the strength of stainless steel and lubricity of PTFE, 50% SS316 powder is added to 50% PTFE. Abrasion resistance of metal and higher pressure rating than RPTFE.	-20°C to 200°C (-4°F to 392°F)
TFM1600	TFM is a modified PTFE which reduces permeation to provide advantages for corrosive applications or those applications where PTFE is used as a barrier to protect against or contain aggressive chemicals.	-40°C to 180°C (-40°F to 350°F)
DELRIN	High pressure seat material. Delrin material is able to sustain pressure up to 5000 psig. However, it is not recommended to use in oxygen applications.	-20°C to 80°C (-4°F to 180°F)
PEEK	Highest pressure resistance. Excellent in recovery from deformation, and high degree of dimensional stability. High mechanical strength.	-20°C to 240°C (-4°F to 464°F)

Automation Accessories

Pneumatic Actuators
VT Series – Rack & Pinion Type

The VT Series rack & pinion actuators are reliable quality products, which can be relied on to perform faultlessly under any difficult circumstances.. For double-acting mode, the actuator is available in 11 sizes. Under the provision of common power supply (80 psi), the output torque ranges from 8.02 to 2877 Nm (71 to 25469 in-lbs). For single-active, also known as spring return type, 10 sizes are available.



Electric Actuators
JS Series

The JS Series electric actuators are made in new sizes from 34.3 to 597.8 Nm (303.6 to 5290.8 in-lbs), which are generally applied for ball valves with maximum size 6", and butterfly valves with maximum size 12", and are available in on-off or modulating versions, with a choice of duty cycles. All models include standard manual override, visual position indicator, torque limiter and adjustable-position switches.



VSII™ Namur Type Solenoid Valves for Valve Actuator

VSII™ namur type solenoid valve is specifically engineered to pilot pneumatic process valve actuators. Using enhanced materials, VSII™ has an operating temperature range from -20°C up to 50°C (-4°F up to 140°F). The most notable improvement is the patened rotary sealing plate. It features in the field conversion form 3/2 to 5/2 action without the need for tools or additional parts, and incorporates exhaust feedback to increase actuator spring life span.



Other Fire-safe Products				
FSB 2D	FSB 26	FSB 23	FSB 1D	FSB 22
				
CLASS150 (PN16/40) DN15 - DN200	6000 psi (420 bar) DN8 - DN50	3000 psi (210 bar) DN8 - DN50	PN16/PN40 DN15 - DN100	2000 psi (140bar) DN8 - DN50

How to order

VALVE TYPE	PORT	BODY MATERIAL	SEAT	TRIM	TYPE OF CONNECTION	PRESSURE RATING	SPECIAL REQUEST	SIZE OF CONNECTION	OTHERS
A	B	C	D	E	F	G	H	I	J

die erste®

Taiwan
5F-1, No. 936,
Sec. 4, Wen-Sin Road
Taichung City 406, Taiwan
T +886 (4) 2231 0059
F +886 (4) 2236 0236

Shanghai
Rm. 1803-A, No.
678, Gu-Bei Rd.,
Shanghai, China
T +86 (21) 5777 3810
F +86 (21) 5777 3819

DIE-ERSTE INDUSTRY CO., LTD.
www.die-erste.com | sales@die-erste.ocm

Copyright © 2019 by DIE ERSTE INDUSTRY CO., LTD. **CM-112/FSB 35 V4.2**
Due to continuous development of the products, DIE ERSTE reserves the right to alter the dimension and information contained in the document as required without notice. For specific performance data and proper material selection, please consult with your DIE ERSTE representatives.

JYL®

PNEUMATIC ACTUATOR
Serie JYL-AP



Higher performance and reliability

Fully compliance with all the latest international standards

Wide range options in technical specification and highly cost-effective

Compact housing design, suitable for any application and workin genvironment

DESIGN AND CONSTRUCTION

DESIGN

JYL series pneumatic actuators ha ve introduc ed improvement design for rack and pinion. It is alw ays Vtork's mission to o ffer initiative products by c ombining the long field experienc es in products a pplication and the latest production and materials te chnology a v a il a ble in the market tod ay. The benefit of new design has long been verified in practic e. With new te chnicalfe atures equipped, Vtork series pneumatic actuators have advanta geous characteristic in:

- Reliability
- High performance
- Fully compliance with all the latest international standards
- Extensive products range allows best versatility at lower price
- Innovations and patented solutions for a universal drive shaft
- Multifunction position indicator
- Compact and light

CONSTRUCTION

1. A single compact design utilizing identical body and end caps for both double acting and spring return models. This feature reduces inventory and allows field conversion, by adding or removing modular spring cartridges.

2. Full conformance to following latest specifications: ISO 5211, DIN 3337 and VDI/VDE 3845 for product interchangeability and easy mounting of solenoids, limit switches and other accessories.

3. JYL piston rack and pinion design for compact construction, symmetric mounting position, high-cycle life and fast operation. Reverse rotation can be accomplished in the field by simply inverting the pistons.


4. Two independent external travel stop adjustments permit easy and precise adjustment of +/- 5° in both directions. This adjustment may be made in either the open or closed position and provides for accurate valve alignment.

5. Multiple bearings and guides on pistons and racks for precise operation, low friction, high cycle life and a blowout proof pinion shaft.

6. Electroless nickel-plated blowout resistant, bearing guided, one-piece pinion shaft for improved safety and maximum cycle life.

7. High precision teeth on piston racks and pinion shaft for accurate positioning, low backlash, and maximum engagement resulting in overall efficient operation.

8. Extruded aluminum body with both internal and external corrosion protections having a honed cylinder surface for longer life and a lower coefficient of friction.

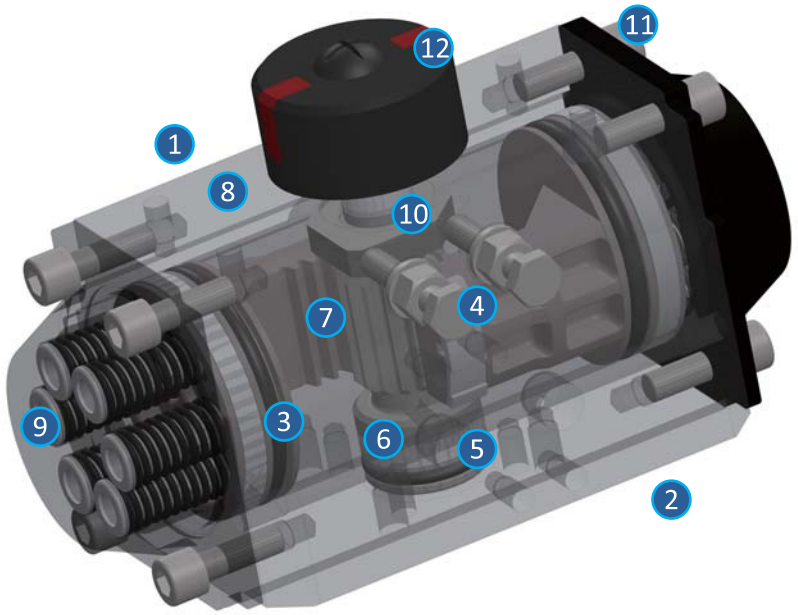

9. Modular preloaded spring cartridges designed with coated springs for simple range versatility, greater safety and corrosion resistance.

10. Selected high quality bearings and seals that provide a wide operating temperature range, low friction, and high cycle life.

11. Internal and external stainless steel fasteners for long term corrosion resistance.

12. Multifunctional position indicator for visual position indication, and a direct, easy, economical way to mount popular sensors.

RANGE OF OPTIONS, QUALITY MANUFACTURING, AND ACCESSORIES

RANGE OF OPTIONS

A. Stainless steel 304 or 316 drive shafts are available on request for all sizes no matter the type of corrosion protection selected.
B. For extremely high or low temperature applications, all models may be equipped with FPM or Silicon O rings along with an JYL tested and certified suitable lubricant.
C. Other than the standard double square bottom drive shaft connection, we can supply a keyed drive connection, a flat head connection or a special personalized drive connection.


QUALITY MANAGEMENT

- Production conforms to ISO9001.
- Each individual actuator has been factory inspe cted and tested and given a serial number for full trac e ability.
- Each individual actuator is individually packed in a special cardboard carton for protection,with a product description label for easy identification and includes installation,operation and maintenance instructions .

ACCESSORIES AVAILABLE

- Different Square reductions suitable for drive shaft
- Centering rings for all sizes
- Brackets
- Couplings
- Solenoid valves
- Switch boxes
- Proximity switches
- Gear boxes
- Positioners

Parts And Materials

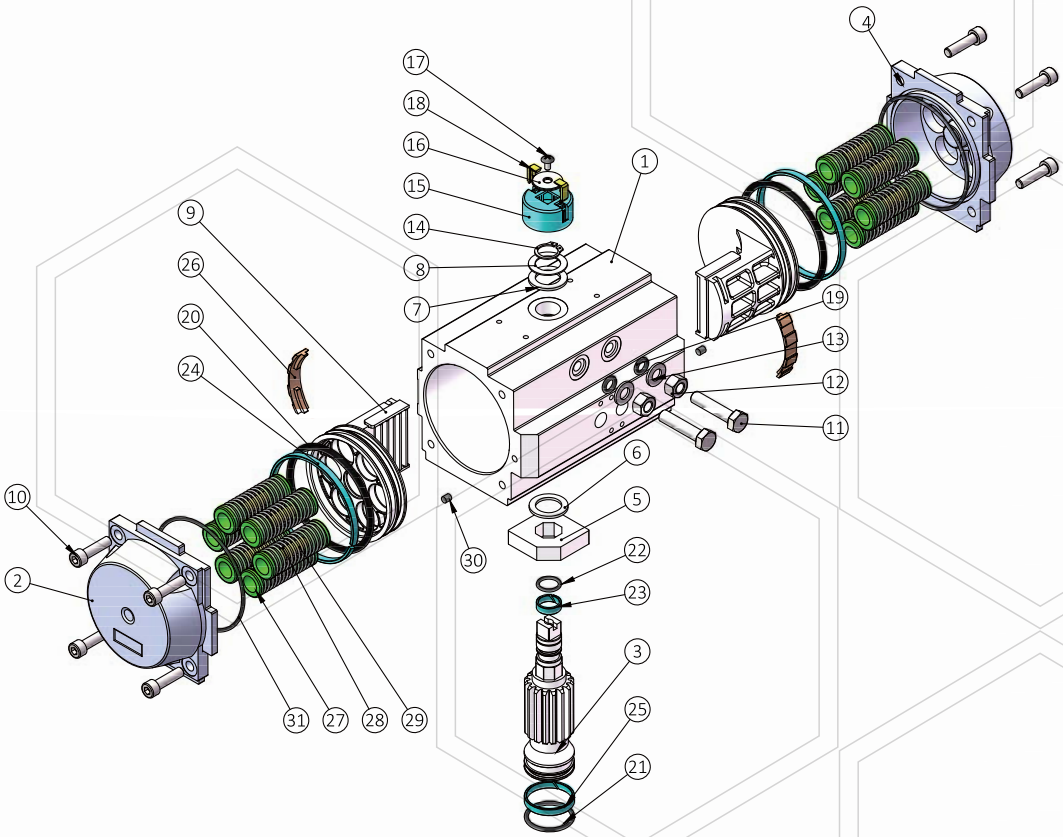

Item Number	Part Description	Material Quality	QTY	Item Number	Part Description	Material Quality	QTY	Item Number	Part Description	Material Quality	QTY
1	Body	Aluminium alloy	1	12	Nut(stop screw)	Stainless steel	2	23	Bearing(pinion top)	POM+PTFE	1
2	Left End cap	Aluminium alloy	1	13	Washer (stop screw)	Stainless steel	2	24	Bearing(pinion head)	POM+PTFE	2
3	Drive shaft	Alloy Steel	1	14	Spring clip	Spring steel	1	25	Bearing(pinion bottom)	POM+PTFE	1
4	Right end cap	Aluminium alloy	1	15	Position indicator	Nylon	1	26	Wear band	Nylon	2
5	OCTI-CAM	Alloy Steel	1	16	Indicator thrust bearing	Stainless steel	1	27	Spring seat	Nylon	24
6	Thrust bearing (pinion top)	POM+PTFE	1	17	Cap screw	Stainless steel	1	28	Spring	High-carbon steel	12
7	Thrust bearing	POM+PTFE	1	18	Color code	Nylon	2	29	Straining beam	Copper pipe	12
8	Thrust washer	Stainless steel	1	19	"o" ring(stop screw)	NBR	2	30	Plug	NBR	2
9	Piston	Aluminium alloy	2	20	"o" ring(piston)	NBR	2	31	"o" ring(end cap)	NBR	2
10	Cap screw (end cap)	Stainless steel	8	21	"o" ring(pinion bottom)	NBR	1				
11	Stop top screw	Stainless steel	2	22	"o" ring(pinion top)	NBR	1				

TECHNICAL DATA(METRIC UNIT)

Model TypeA	AP032		AP050		AP065		AP0075		AP085		AP095		AP110		AP125		AP140		AP160		AP190		AP210		AP240		AP270		AP300		AP350		AP400	
	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S
Diameter mm	32		50		65		75		85		95		110		125		140		160		190		210		240		270		300		350		400	
Air Volume Opening(L)	0.03		0.09		0.19		0.30		0.44		0.88		0.83		1.41		1.76		2.85		4.75		6.60		11.40		15.80		19.09		27.65		42.81	
Air Volume Closing(L)	0.04		0.15		0.32		0.50		0.66		1.17		1.27		2.13		2.72		4.08		7.20		10.29		15.10		18.80		28.23		44.10		62.05	
Opening Time (sec)	0.3		0.3	0.9	0.4	0.9	0.4	0.9	0.9	1.0	0.9	1.4	0.9	1.4	1.3	2.4	1.3	2.8	2.0	4.8	2.2	2.4	2.9	3.4	3.2	3.8	4.4	5.0	5.0	6.0	6.2	7.4	7.5	9.6
closing Time (sec)	0.4		0.4	0.7	0.4	0.8	0.4	0.9	0.9	1.2	1.0	1.4	1.0	1.6	1.4	2.4	1.4	3.0	2.4	4.9	2.6	3.0	3.8	4.1	3.7	4.0	4.9	5.5	6.0	6.8	7.2	8.4	8.5	10.6
Weight (Kg)hai	0.47	0.59	1.13	1.25	1.97	2.21	2.93	3.29	3.78	4.26	5.14	5.86	6.09	7.17	10.86	12.54	13.77	15.93	20.15	23.75	28.41	33.81	40.03	48.43	52.6	77.76	73.64	90.6	108	135.6	146.7	188.1	220.5	283.5

1. For model 32-160

(1)Room temperature (2)Actuator stroke 90° (3) Solenoid valve with orifice of 4 mm and a flow capacity Qn400L/min (4) Inside pipe diameter 6 mm (5) Medium clean air

(6) Air supply pressure 5.5 bar (7)Actuator without external resistance load

2. For model 190-400

(1)Room temperature (2)Actuator stroke 90° (3)Solenoid valve with orifice of 12 mm and a flow capacity Qn5100L/min (4) Inside pipe diameter 8 mm (5) Medium clean air


(6) Air supply pressure 5.5 bar (7)Actuator without external resistance load


Cautions: obviously on the field applications when one or more of the above parameter are different, the moving time will be di fferent

Air consumption rest with air supply, air volume and action cycle times. Expressions:

$$L/min = \text{Air volume(opening air volume+closing air volume)} X \left[\frac{\text{Air Supply(Kpa)+101.3}}{101.3} \right] X \text{Action times(/min)}$$

METRIC TORQUE RATINGS



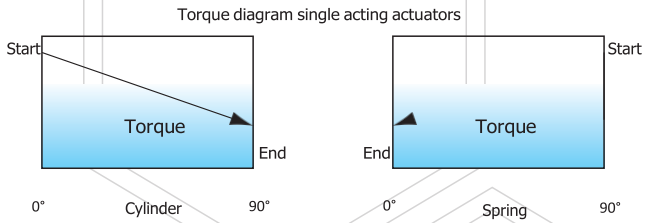

DOUBLE ACTING TORQUE RATINGS IN Nm

Model	Supply Pressure (Unit:bar)									
	2.5	**3**	**3.5**	**4**	**4.5**	**5**	**5.5**	**6**	**7**	**8**
AP032	2.9	3.4	4.0	4.6	5.3	5.9	6.5	7.1	8.3	9.5
AP050	8.6	10.4	12.3	14.2	16.0	17.9	19.8	21.6	25.4	29.1
AP065	17.4	21.2	25.0	28.7	32.5	36.3	40.1	43.9	51.4	59.0
AP075	27.0	32.9	38.8	44.7	50.5	56.4	62.3	68.2	79.9	91.7
AP085	39.7	48.3	56.9	65.6	74.2	82.8	91.4	100.1	117.3	134.6
AP095	55.7	67.9	80.0	92.1	104.2	116.4	128.5	140.6	164.8	189.1
AP110	72.0	89.3	105.0	120.6	136.3	152.0	167.6	183.3	214.6	245.9
AP125	128.7	159.5	187.5	215.4	243.4	271.4	299.4	327.4	383.3	439.3
AP140	196	237	278	319	360	401	442	483	565	647
AP160	263.5	326.6	383.9	441.2	498.5	555.8	613.1	670.4	785.0	899.7
AP190	428.5	518.0	607.3	696.6	785.9	875.3	964.6	1053.9	1232.5	1411.1
AP210	598.2	723.2	847.9	972.6	1097.3	1222.0	1346.6	1471.3	1720.7	1970.1
AP240	928.3	1122.0	1315.0	1508.0	1702.0	1895.0	2089.0	2282.0	2669.0	3056.0
AP270	1305.0	1577.0	1849.0	2121.0	2393.0	2665.0	2937.0	3209.0	3753.0	4297.0
AP300	1678.6	2029.4	2379.3	2729.2	3079.1	3429.0	3778.9	4128.8	4828.5	5528.3
AP350	2492.5	3011.8	3531.1	4050.4	4569.6	5088.9	5608.2	6127.5	7166.0	8204.6
AP400	3798.1	4589.4	5380.7	6172.0	6963.3	7754.5	8545.8	9337.1	10919.7	12502.2

SINGLE ACTING TORQUE RATINGS IN Nm

Model	Supply Pressure (Unit:bar)																				Spring stroke	
	2.5		**3**		**3.5**		**4**		**4.5**		**5**		**5.5**		**6**		**7**		**8**			
	0°	**90°**	**0°**	**90°**	**0°**	**90°**	**0°**	**90°**	**0°**	**90°**	**0°**	**90°**	**0°**	**90°**	**0°**	**90°**	**0°**	**90°**	**0°**	**90°**	**90°**	**0°**
AP050 S05	**5.1**	**3.4**	6.9	5.3	8.8	7.2	10.7	9.0	12.5	10.9	14.4	12.8	16.3	14.6	18.1	16.5	21.9	20.2	25.6	23.9	**5.2**	**3.5**
AP050 S06	4.4	2.4	**6.2**	**4.3**	8.1	6.1	10.0	8.0	11.8	9.9	13.7	11.7	15.6	13.6	17.4	15.5	21.2	19.2	24.9	22.9	**6.2**	**4.2**
AP050 S07			5.5	3.2	**7.4**	**5.1**	9.3	7.0	11.1	8.8	13.0	10.7	14.9	12.6	16.7	14.4	20.5	18.2	24.2	21.9	**7.2**	**4.9**
AP050 S08					6.7	4.1	**8.6**	**5.9**	10.4	7.8	12.3	9.7	14.2	11.5	16.0	13.4	19.8	17.1	23.5	20.9	**8.2**	**5.6**
AP050 S09							7.9	4.9	**9.7**	**6.8**	11.6	8.6	13.5	10.5	15.3	12.4	19.1	16.1	22.8	19.8	**9.3**	**6.3**
AP050 S10									9.0	5.7	**10.9**	**7.6**	12.8	9.5	14.6	11.3	18.4	15.1	22.1	18.8	**10.3**	**7.0**
AP050 S11											10.2	6.6	**12.1**	**8.4**	13.9	10.3	17.7	14.0	21.4	17.8	**11.3**	**7.7**
AP050 S12													11.4	7.4	**13.2**	**9.3**	17.0	13.0	20.7	16.7	**12.4**	**8.4**
AP065 S05	**8.7**	**4.3**	12.5	8.1	16.3	11.9	20.0	15.6	23.8	19.4	27.6	23.2	31.4	27.0	35.2	30.8	42.7	38.3	50.3	45.9	**13.1**	**8.7**
AP065 S06	7.0	1.7	**10.7**	**5.5**	14.5	9.2	18.3	13.0	22.1	16.8	25.9	20.6	29.7	24.4	33.4	28.2	41.0	35.7	48.6	43.3	**15.7**	**10.4**
AP065 S07			9.0	2.8	**12.8**	**6.6**	16.6	10.4	20.4	14.2	24.1	18.0	27.9	21.8	31.7	25.5	39.3	33.1	46.8	40.7	**18.3**	**12.2**
AP065 S08					11.0	4.0	**14.8**	**7.8**	18.6	11.6	22.4	15.4	26.2	19.1	30.0	22.9	37.5	30.5	45.1	38.1	**21.0**	**13.9**
AP065 S09							13.1	5.2	**16.9**	**9.0**	20.7	12.7	24.4	16.5	28.2	20.3	35.8	27.9	43.4	35.4	**23.6**	**15.7**
AP065 S10									15.1	6.3	**18.9**	**10.1**	22.7	13.9	26.5	17.7	34.0	25.2	41.6	32.8	**26.2**	**17.4**
AP065 S11											17.2	7.5	**21.0**	**11.3**	24.7	15.1	32.3	22.6	39.9	30.2	**28.8**	**19.1**
AP065 S12													19.2	8.7	**23.0**	**12.4**	30.6	20.0	38.1	27.6	**31.4**	**20.9**
AP075 S05	**16.3**	**10.2**	22.2	16.0	28.1	21.9	34.0	27.8	39.8	33.7	45.7	39.6	51.6	45.4	57.5	51.3	69.2	63.1	81.0	74.8	**16.9**	**10.7**
AP075 S06	14.2	6.8	**20.1**	**12.7**	25.9	18.6	31.8	24.4	37.7	30.3	43.6	36.2	49.4	42.1	55.3	47.9	67.1	59.7	78.8	71.4	**20.2**	**12.8**
AP075 S07			17.9	9.3	**23.8**	**15.2**	29.7	21.1	35.6	26.9	41.4	32.8	47.3	38.7	53.2	44.6	64.9	56.3	76.7	68.1	**23.6**	**15.0**
AP075 S08					21.7	11.8	**27.5**	**17.7**	33.4	23.6	39.3	29.4	45.2	35.3	51.0	41.2	62.8	53.0	74.5	64.7	**27.0**	**17.1**
AP075 S09							25.4	14.3	**31.3**	**20.2**	37.1	26.1	43.0	32.0	48.9	37.8	60.7	49.6	72.4	61.3	**30.3**	**19.3**
AP075 S10									29.1	16.8	**35.0**	**22.7**	40.9	28.6	46.8	34.5	58.5	46.2	70.3	58.0	**33.7**	**21.4**
AP075 S11											32.9	19.3	**38.7**	**25.2**	44.6	31.1	56.4	42.8	68.1	54.6	**37.1**	**23.5**
AP075 S12													36.6	21.8	**42.5**	**27.7**	54.2	39.5	66.0	51.2	**40.4**	**25.7**
AP085 S05	**23.2**	**13.7**	31.8	22.3	40.4	30.9	49.0	39.5	57.6	48.1	66.3	56.8	74.9	65.4	83.5	74.0	100.8	91.3	118.0	108.5	**26.1**	**16.6**
AP085 S06	19.8	8.4	**28.4**	**17.0**	37.1	25.7	45.7	34.3	54.3	42.9	62.9	51.5	71.6	60.2	80.2	68.8	97.4	86.0	114.7	103.3	**31.3**	**19.9**
AP085 S07			25.1	11.8	**33.8**	**20.5**	42.4	29.1	51.0	37.7	59.6	46.3	68.3	55.0	76.9	63.6	94.1	80.8	111.4	98.1	**36.5**	**23.2**
AP085 S08					30.4	15.2	**39.1**	**23.9**	47.7	32.5	56.3	41.1	64.9	49.7	73.6	58.4	90.8	75.6	108.1	92.9	**41.7**	**26.5**
AP085 S09							35.8	18.7	**44.4**	**27.3**	53.0	35.9	61.6	44.5	70.3	53.2	87.5	70.4	104.8	87.7	**46.9**	**29.8**
AP085 S10									41.1	22.1	**49.7**	**30.7**	58.3	39.3	67.0	48.0	84.2	65.2	101.5	82.5	**52.1**	**33.1**
AP085 S11											46.4	25.5	**55.0**	**34.1**	63.6	42.7	80.9	60.0	98.1	77.2	**57.3**	**36.4**
AP085 S12													51.7	28.9	**60.3**	**37.5**	77.6	54.8	94.8	72.0	**62.5**	**39.7**
AP095 S05	**33.6**	**20.9**	45.8	33.0	57.9	45.1	70.0	57.3	82.1	69.4	94.3	81.5	106.4	93.6	118.5	105.8	142.7	130.0	167.0	154.2	**34.9**	**22.1**
AP095 S06	29.2	13.9	**41.4**	**26.1**	53.5	38.2	65.6	50.3	77.7	62.4	89.8	74.5	102.0	86.7	114.1	98.8	138.3	123.0	162.6	147.3	**41.8**	**26.5**
AP095 S07			36.9	19.1	**49.1**	**31.2**	61.2	43.3	73.3	55.4	85.4	67.6	97.5	79.7	109.7	91.8	133.9	116.1	158.1	140.3	**48.8**	**30.9**
AP095 S08					44.6	24.2	**56.8**	**36.4**	68.9	48.5	81.0	60.6	93.1	72.7	105.2	84.8	129.5	109.1	153.7	133.3	**55.8**	**35.4**
AP095 S09							52.3	29.4	**64.5**	**41.5**	76.6	53.6	88.7	65.8	100.8	77.9	125.1	102.1	149.3	126.4	**62.7**	**39.8**
AP095 S10									60.0	34.5	**72.2**	**46.7**	84.3	58.8	96.4	70.9	120.6	95.1	144.9	119.4	**69.7**	**44.2**
AP095 S11											67.7	39.7	**79.9**	**51.8**	92.0	63.9	116.2	88.2	140.5	112.4	**76.7**	**48.6**
AP095 S12													75.4	44.8	**87.6**	**57.0**	111.8	81.2	136.0	105.4	**83.6**	**53.0**
AP110 S05	**43.4**	**26.2**	60.7	43.4	76.4	59.1	92.0	74.8	107.7	90.4	123.4	106.1	139.0	121.8	154.7	137.4	186.0	168.8	217.3	200.1	**45.9**	**28.6**
AP110 S06	37.7	17.0	**55.0**	**34.3**	70.6	49.9	86.3	65.6	102.0	81.3	117.6	96.9	133.3	112.6	149.0	128.3	180.3	159.6	211.6	190.9	**55.0**	**34.3**
AP110 S07			49.3	25.1	**64.9**	**40.8**	80.6	56.4	96.2	72.1	111.9	87.8	127.6	103.4	143.2	119.1	174.6	150.4	205.9	181.8	**64.2**	**40.0**
AP110 S08					59.2	31.6	**74.9**	**47.3**	90.5	62.9	106.2	78.6	121.9	94.3	137.5	109.9	168.9	141.3	200.2	172.6	**73.4**	**45.8**
AP110 S09							69.1	38.1	**84.8**	**53.8**	100.5	69.4	116.1	85.1	131.8	100.8	163.1	132.1	194.5	163.4	**82.5**	**51.5**
AP110 S10									79.1	44.6	**94.8**	**60.3**	110.4	75.9	126.1	91.6	157.4	122.9	188.7	154.2	**91.7**	**57.2**
AP110 S11											89.0	51.1	**104.7**	**66.7**	120.4	82.4	151.7	113.7	183.0	145.1	**100.9**	**62.9**
AP110 S12													99.0	57.6	**114.6**	**73.2**	146.0	104.6	177.3	135.9	**110.0**	**68.6**

METRIC TORQUE RATINGS


JYL®

SINGLE ACTING TORQUE RATINGS IN Nm


Model	Supply Pressure (Unit: bar)																				Spring stroke	
	2.5		3		3.5		4		4.5		5		5.5		6		7		8			
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°
AP125 S05	**77.7**	**48.2**	108.5	78.9	136.5	106.9	164.4	134.9	192.4	162.9	220.4	190.9	248.4	218.4	276.4	246.8	332.3	302.8	388.3	358.7	80.6	51.0
AP125 S06	67.5	32.0	**98.3**	**62.8**	126.3	90.8	154.2	118.8	182.2	146.8	210.2	174.7	238.2	202.7	266.2	230.7	322.1	286.7	378.1	342.6	96.7	61.2
AP125 S07			88.1	46.7	**116.1**	**74.7**	144.0	102.7	172.0	130.7	200.0	158.6	228.0	186.6	256.0	214.6	311.9	270.6	367.9	326.5	112.8	71.4
AP125 S08					105.9	58.6	**133.8**	**86.6**	161.8	114.5	189.8	142.5	217.8	170.5	245.8	198.5	301.7	254.4	357.7	310.4	128.9	81.6
AP125 S09							123.6	70.5	**151.6**	**98.4**	179.6	126.4	207.6	154.4	235.6	182.4	291.5	238.3	347.5	294.3	145.0	91.8
AP125 S10									141.4	82.3	169.4	110.3	197.4	138.3	225.4	166.3	281.3	222.2	337.3	278.2	161.1	102.0
AP125 S11											159.2	94.2	187.2	122.2	215.2	150.2	271.1	206.1	327.1	262.1	177.2	112.2
AP125 S12													177.0	106.1	205.0	134.0	260.9	190.0	316.9	246.0	193.3	122.4
AP140 S05	114.2	74.1	155.1	115	196.1	156	237.0	196.9	277.9	237.8	318.8	278.7									122.4	82.3
AP140 S06	97.7	49.6	138.7	90.6	179.6	131.5	220.5	172.4	261.5	213.3	302.4	254.3	343.3	295.2							146.8	98.7
AP140 S07			122.2	66.1	163.2	107.0	204.1	147.9	245.0	188.9	285.9	229.8	326.9	270.7	367.8	311.6					171.3	115.2
AP140 S08					146.7	82.5	187.6	123.5	228.6	164.4	269.5	205.3	310.4	246.2	351.3	287.2	433.2	369.0			195.8	131.6
AP140 S09							171.2	99.0	212.1	139.9	253.0	180.9	294.0	221.8	334.9	262.7	416.7	344.6	498.6	426.4	220.2	148.1
AP140 S10									195.7	115.5	236.6	156.4	277.5	197.3	318.4	238.2	400.3	320.1	482.1	401.9	244.7	164.5
AP140 S11											220.1	131.9	261.1	172.8	302.0	213.8	383.8	295.6	465.7	377.5	269.2	181.0
AP140 S12													244.6	148.4	285.5	189.3	367.4	271.1	449.2	353.0	293.6	197.4
AP160 S05	**153.5**	**101.3**	216.6	164.4	273.9	221.7	331.2	279.0	388.5	336.3	445.8	393.6	503.1	450.9	560.4	508.2	675.0	622.8	789.7	737.4	162.3	110.0
AP160 S06	131.5	68.8	**194.6**	**131.9**	251.9	189.2	309.2	246.5	366.5	303.8	423.8	361.1	481.1	418.4	538.4	475.7	653.0	590.3	767.7	705.0	194.7	132.0
AP160 S07			172.6	99.5	**229.9**	**156.8**	287.2	214.1	344.5	271.4	401.8	328.7	459.1	386.0	516.4	443.3	631.0	557.9	745.7	672.5	227.2	154.0
AP160 S08					207.9	124.3	**265.2**	**181.6**	322.5	238.9	379.8	296.2	437.1	353.5	494.4	410.8	609.0	525.4	723.7	640.1	259.6	176.0
AP160 S09							243.2	149.2	**300.5**	**206.5**	357.8	263.8	415.1	321.1	472.4	378.4	587.0	493.0	701.7	607.6	292.1	198.0
AP160 S10									278.5	174.0	335.8	231.3	393.1	288.6	450.4	345.9	565.0	460.5	679.7	575.2	324.5	220.0
AP160 S11											313.8	198.9	371.1	256.2	428.4	313.5	543.0	428.1	657.7	542.7	357.0	242.0
AP160 S12													349.1	223.7	406.4	281.0	521.0	395.6	635.7	510.3	389.4	264.0
AP190 S05	246.8	167.4	336.3	256.9	425.6	346.2	514.9	435.5	604.2	524.8	693.5	614.1									261.2	181.8
AP190 S06	210.4	115.1	299.9	204.6	389.2	293.9	478.5	383.3	567.8	472.6	657.2	561.9	746.5	651.2							313.4	218.1
AP190 S07			263.6	152.4	352.9	241.7	442.2	331.0	531.5	420.3	620.8	509.6	710.1	599.0	799.4	688.3					365.6	254.5
AP190 S08					316.5	189.5	405.8	278.7	495.1	368.1	584.5	457.4	673.8	546.7	779.5	636.0	941.7	814.7			417.8	290.8
AP190 S09							369.5	226.6	458.8	315.9	548.1	405.2	637.4	494.5	745.2	583.8	905.3	762.4	1084.0	941.1	470.1	327.2
AP190 S10									422.4	263.6	511.8	353.0	601.1	442.3	710.9	531.6	869.0	710.2	1047.6	888.8	522.3	363.5
AP190 S11											475.4	300.7	564.7	390.0	676.6	479.3	832.6	658.0	1011.3	836.6	574.5	399.9
AP190 S12													528.4	337.8	642.3	427.1	796.3	605.7	974.9	784.4	628.8	436.8
AP210 S05	**352.8**	**239.1**	477.8	364.1	602.5	488.8	727.2	613.5	851.9	738.2	976.6	862.9	1101.2	987.5	1225.9	1112.2	1475.3	1361.6	1724.7	1611.0	359.1	245.4
AP210 S06	303.7	167.3	**428.7**	**292.3**	553.4	417.0	678.1	541.7	802.8	666.4	927.5	791.0	1052.2	915.7	1176.9	1040.4	1426.2	1289.8	1675.6	1539.2	430.9	294.5
AP210 S07			379.6	220.5	**504.3**	**345.2**	629.0	469.8	753.7	594.5	878.4	719.2	1003.1	843.9	1127.8	968.6	1377.2	1218.0	1626.5	1467.4	502.7	343.6
AP210 S08					455.3	273.3	**579.9**	**398.0**	704.6	522.7	829.3	647.4	954.0	772.1	1078.7	896.8	1328.1	1146.2	1577.5	1395.5	574.6	392.6
AP210 S09							530.9	326.2	**655.6**	**450.9**	780.2	575.6	904.9	700.3	1029.6	825.0	1279.0	1074.3	1528.4	1323.7	646.4	441.7
AP210 S10									606.5	379.1	731.2	503.8	855.8	628.4	980.5	753.1	1229.9	1002.5	1479.3	1251.9	718.2	490.8
AP210 S11											682.1	431.9	806.8	556.6	931.5	681.3	1180.8	930.7	1430.2	1180.1	790.0	539.9
AP210 S12													757.7	484.8	882.4	609.5	1131.8	858.9	1381.1	1108.3	861.8	589.0
AP240 S05	517.8	374.3	711.2	567.7	904.6	761.1	1098.0	954.5	1291.4	1147.9	1484.8	1341.3									554.0	410.5
AP240 S06	435.7	263.5	629.1	456.9	822.5	650.3	1015.9	843.7	1209.3	1037.1	1402.7	1230.5	1596.1	1423.9							664.8	492.6
AP240 S07			547.0	346.1	740.4	539.5	933.8	732.9	1127.2	926.3	1320.6	1119.7	1514.0	1313.1	1707.4	1506.5					775.6	574.7
AP240 S08					658.3	428.7	851.7	622.1	1045.1	815.5	1238.5	1008.9	1431.9	1202.3	1625.3	1395.7	2012.1	1782.5			886.4	656.8
AP240 S09							769.6	511.3	963.0	704.7	1156.4	898.1	1349.8	1091.5	1543.2	1284.9	1930.0	1671.7	2316.8	2058.5	997.2	738.9
AP240 S10									880.9	593.9	1074.3	787.3	1267.7	980.7	1461.1	1174.1	1847.9	1560.9	2234.7	1947.7	1108.0	821.0
AP240 S11											992.2	676.5	1185.6	869.9	1379.0	1063.3	1765.8	1450.1	2152.6	1836.9	1218.8	903.1
AP240 S12													1103.5	759.1	1296.9	952.5	1683.7	1339.3	2070.5	1726.1	1329.6	985.2
AP270 S05	745.9	**519.4**	1017.9	791.4	1289.9	1063.4	1561.8	1335.3	1833.8	1607.3	2105.7	1879.2									786.0	**559.5**
AP270 S06	634.0	362.2	**906.0**	**634.2**	1178.0	906.2	1449.9	1178.1	1721.9	1450.1	1993.8	1722.0	2265.8	1994.0							943.2	**671.4**
AP270 S07			794.1	477.0	1166.1	**749.0**	1338.0	1020.9	1610.0	1292.9	1881.9	1564.8	2153.9	1836.8	2425.9	2108.8					1100.4	**783.3**
AP270 S08					954.2	591.8	1226.1	**863.7**	1498.1	1135.7	1770.0	1407.6	2042.0	1679.6	2314.0	1951.6	2857.9	2495.5			1257.6	**895.2**
AP270 S09							1114.2	706.5	1386.2	**978.5**	1658.1	1250.4	1930.1	1522.4	2202.1	1794.4	2746.0	2338.3	3289.9	2882.2	1414.8	**1007.1**
AP270 S10									1274.3	821.3	1546.2	**1093.2**	1818.2	1365.2	2090.2	1637.2	2634.1	2181.1	3178.0	2725.0	1572.0	**1119.0**
AP270 S11											1434.3	936.0	1706.3	**1208.0**	1978.3	1480.0	2522.2	2023.9	3066.1	2567.8	1729.2	1230.9
AP270 S12													1594.4	1050.8	1866.4	**1322.8**	2410.3	1866.7	2954.2	2410.6	1886.4	**1342.8**
AP300 S05	**987.5**	**646.7**	1338.3	997.5	1688.2	1347.4	2038.1	1697.3	2388.0	2047.2	2737.9	2397.1	3087.8	2747.0	3437.7	3096.9	4137.4	3796.6	4837.2	4496.4	1031.9	**691.1**
AP300 S06	849.3	440.3	**1200.1**	**791.1**	1550.0	1141.0	1899.9	1490.9	2249.8	1840.8	2599.6	2190.7	2949.5	2540.6	3299.4	2890.5	3999.2	3590.3	4699.0	4290.1	1238.3	**829.3**
AP300 S07			1061.9	584.7	**1411.7**	**934.6**	1761.6	1284.5	2111.5	1634.4	2461.4	1984.3	2811.3	2334.2	3161.2	2684.1	3861.0	3383.9	4560.8	4083.7	1444.7	**967.5**
AP300 S08					1273.5	728.2	**1623.4**	**1078.1**	1973.3	1428.0	2323.2	1777.9	2673.1	2127.8	3023.0	2477.7	3722.8	3177.5	4422.6	3877.3	1651.0	**1105.8**
AP300 S09							1485.2	871.8	**1835.1**	**1221.7**	2185.0	1571.5	2534.9	1921.4	2884.8	2271.3	3584.6	2971.1	4284.4	3670.9	1857.4	**1244.0**
AP300 S10									1696.9	1015.3	2046.8	**1365.2**	2396.7	1715.1	2746.6	2065.0	3446.3	2764.7	4146.1	3464.5	2063.8	**1382.2**
AP300 S11											1908.5	1158.8	2258.4	**1508.7**	2608.3	1858.6	3308.1	2558.4	4007.9	3258.2	2270.2	**1520.4**
AP300 S12													2120.2	1302.3	2470.1	**1652.2**	3169.9	2352.0	3869.7	3051.8	2476.6	**1658.6**
AP350 S05	**1498.2**	**1017.1**	2017.5	1536.4	2536.8	2055.6	3056.1	2574.9	3575.3	3094.2	4094.6	3613.5	4613.9	4132.7	5133.2	4652.0	6171.7	5690.6	7210.3	6729.1	1475.5	**994.3**
AP350 S06			**1818.6**	**1241.3**	2337.9	1760.5	2857.2	2279.8	3376.5	2799.1	3895.8	3318.4	4415.0	3837.7	4934.3	4356.9	5972.9	5395.5	7011.4	6434.0	1770.5	**1193.2**
AP350 S07			1619.8	946.2	**2139.1**	**1465.5**	2658.3	1984.7	3177.6	2504.0	3696.9	3023.3	4216.2	3542.6	4735.5	4061.8	5774.0	5100.4	6812.6	6139.0	2065.6	**1392.0**
AP350 S08					1940.2	1170.4	**2459.5**	**1689.6**	2978.8	2208.9	3498.0	2728.2	4017.3	3247.5	4536.6	3766.8	5575.1	4805.3	6613.7	5843.9	2360.7	**1590.9**
AP350 S09					1741.3	875.3	2260.6	1394.6	**2779.9**	**1913.8**	3299.2	2433.1	3818.5	2952.4	4337.7	3471.7	5376.3	4510.2	6414.8	5548.8	2655.8	**1789.7**
AP350 S10							2061.8	1099.5	2581.0	1618.7	**3100.3**	**2138.0**	3619.6	2657.3	4138.9	3176.6	5177.4	4215.1	6216.0	5253.7	2950.9	**1988.6**
AP350 S11							1862.9	804.4	2382.2	1323.7	2901.5	1842.9	**3420.7**	**2362.2**	3940.0	2881.5	4978.6	3920.0	6017.1	4958.6	3246.0	**2187.5**
AP350 S12									2183.3	1028.6	2702.6	1547.8	3221.9	2067.1	3741.2	**2586.4**	4779.7	3624.9	5818.3	4663.5	3541.1	**2386.3**
AP400 S05	2222.0	1497.0	3013.0	2288.0	3805.0	3080.0	4596.0	3871.0	5387.0	4662.0	6179.0	5454.0									2301.0	1576.0
AP400 S06			2698.0	1828.0	3490.0	2620.0	4281.0	3411.0	5072.0	4202.0	5863.0	4993.0	6655.0	5785.0							2761.0	1891.0
AP400 S07			2383.0	1368.0	3174.0	2195.0	3966.0	2951.0	4757.0	3742.0	5548.0	4533.0	6339.0	5324.0	7131.0	6116.0					3221.0	2206.0
AP400 S08					2859.0	1699.0	3650.0	2490.0	4442.0	3282.0	5233.0	4073.0	6024.0	4864.0	6816.0	5656.0	8398.0	7238.0			3682.0	2522.0
AP400 S09					2544.0	1239.0	3335.0	2030.0	4126.0	2821.0	4918.0	3613.0	5709.0	4404.0	6500.0	5195.0	8083.0	6778.0	9665.0	8360.0	4142.0	2837.0
AP400 S10							3020.0	1570.0	3811.0	2361.0	4603.0	3153.0	5394.0	3944.0	6185.0	4735.0	7768.0	6318.0	9350.0	7900.0	4602.0	3152.0
AP400 S11							2705.0	1110.0	3496.0	1901.0	4287.0	2692.0	5079.0	3484.0	5870.0	4275.0	7452.0	5857.0	9035.0	7440.0	5062.0	3467.0
AP400 S12									3181.0	1441.0	3972.0	2232.0	4763.0	2023.0	5555.0	3815.0	7137.0	5397.0	8720.0	6980.0	5522.0	3782.0

INSTALLATION


FRONT VIEW SIDE VIEW

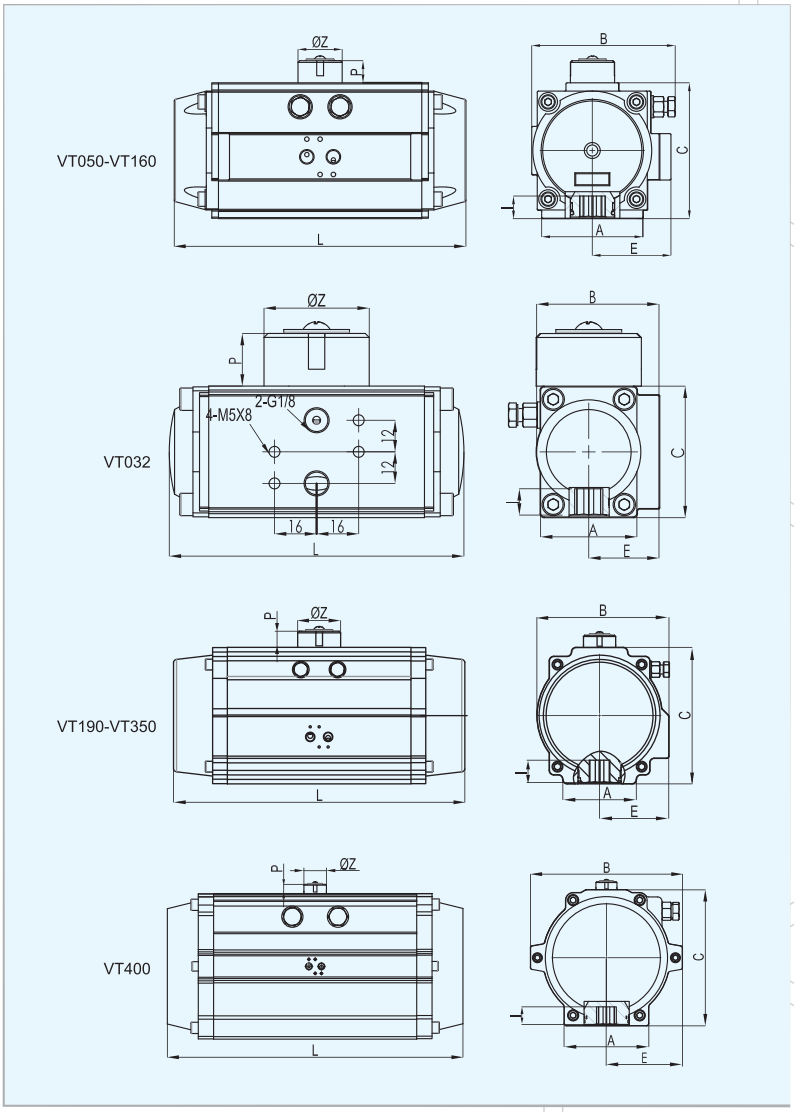


TOP

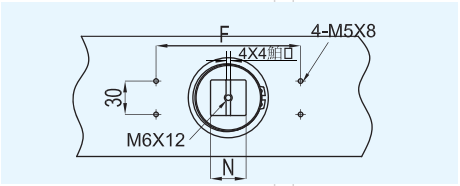

AIR CONNECTION

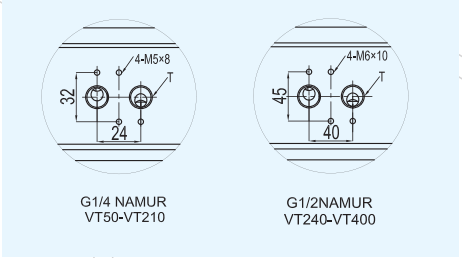

BOTTOM

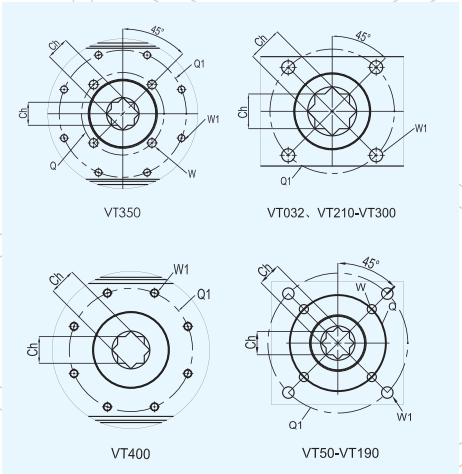

MODEL	A	B	C	L	E	F	P	ØZ	N	I	FLANGE	Q	Q1	W	W1	Ch	T
AP032	37	47	50	110	27	50	20	40	10	10	F03	—	36	—	M5×9	9×9	G1/8"
AP050	45	70.5	70	154	41.5	80	20	40	10	12	F03/05	36	50	M5×7.5	M6×9	11×11	G1/4"
AP065	62	89.5	89	189	51.5	80	20	40	10	16	F05/07	50	70	M6×9	M8×12	14×14	G1/4"
AP075	68	102.5	100	210	59	80	20	40	14	16	F05/07	50	70	M6×9	M8×12	14×14	G1/4"
AP085	68	112.5	113	229	63.5	80	20	40	14	19	F05/07	50	70	M6×9	M8×12	17×17	G1/4"
AP095	92	126	123	264	71	80	20	40	14	19	F05/07	50	70	M6×9	M8×12	17×17	G1/4"
AP110	93	138.5	136	266	76.5	80	20	40	14	19	F07/10	70	102	M8×12	M10×15	17×17	G1/4"
AP125	96	157	161	337	85	80	30	56	22	25	F07/10	70	102	M8×12	M10×15	22×22	G1/4"
AP140	110	178	178	377	97	80	30	56	22	31	F10/12	102	125	M10×15	M12×18	27×27	G1/4"
AP160	112	196	200	412	106	130	30	56	22	31	F10/12	102	125	M10×15	M12×18	27×27	G1/4"
AP190	136	216.5	232	488	112	130	30	56	22	41	F10/14	102	140	M10×15	M16×24	36×36	G1/4"
AP210	140	235.5	255	550	120	130	30	80	32	40	F14	—	140	—	M16×24	36×36	G1/4"
AP240	159	262	292	602	131	130	30	80	32	50	F16	—	165	—	M20×28	46×46	G1/2"
AP270	159	295	331	672	147.5	130	30	80	32	50	F16	—	165	—	M20×28	46×46	G1/2"
AP300	180	335	354	784	173	130	30	80	32	50	F16	—	165	—	M20×28	46×46	G1/2"
AP350	270	385	410	845	195	130	30	80	32	50	F16/F25	165	254	M20×28	M16×30	46×46	G1/2"
AP400	290	520	466	956	260	130	30	80	32	60	F25	—	254	—	M16×30	55×55	G1/2"

MODEL SELECTION

MODEL	TYPE	SPRING QTY	FLANGE	SQURE	OPTION	SEALING PART
AP032	D=DOUBLE ACTING S=SPRING RETURN		F03	9×9	CAP COLOR RAL 7046 9004 5021 3020 6002 5015 TYPE OF BODY P Smooth Surface + hard Anodized S Sandblasted Surface + hard Anodized (Color: Grey) H Sandblasted Surface + hard Anodized (Color: Dark Grey) F Sandblasted Surface + hard Anodized + PTFE Coated	STANDARD NITRILE RUBBER -15°C-+80°C HT FLUORORUBBER (FOR HIGH TEMPERATURE) -15°C-+150°C LT SILASTIC (FOR LOW TEMPERATURE) -40°C-+80°C
AP050		ONLY FOR SPRING REST 4 5 6 7 8 9 10 11 12	F03/05	11×11		
AP065			F05/07	14×14		
AP075			F05/07	14×14		
AP085			F05/07	17×17		
AP095			F05/07	17×17		
AP110			F07/10	17×17		
AP125			F07/10	22×22		
AP140			F10/12	27×27		
AP160			F10/12	27×27		
AP190			F10/14	36×36		
AP210			F14	36×36		
AP240			F16	46×46		
AP270			F16	46×46		
AP300			F16	46×46		
AP350			F16/25	46×46		
AP400			F25	55×55		

Controlval®
Representante Exclusivo Lationamérica
+56 9 4458 4722
ventas@controlval.cl
www.control-val.cl