


G.A.DRG-

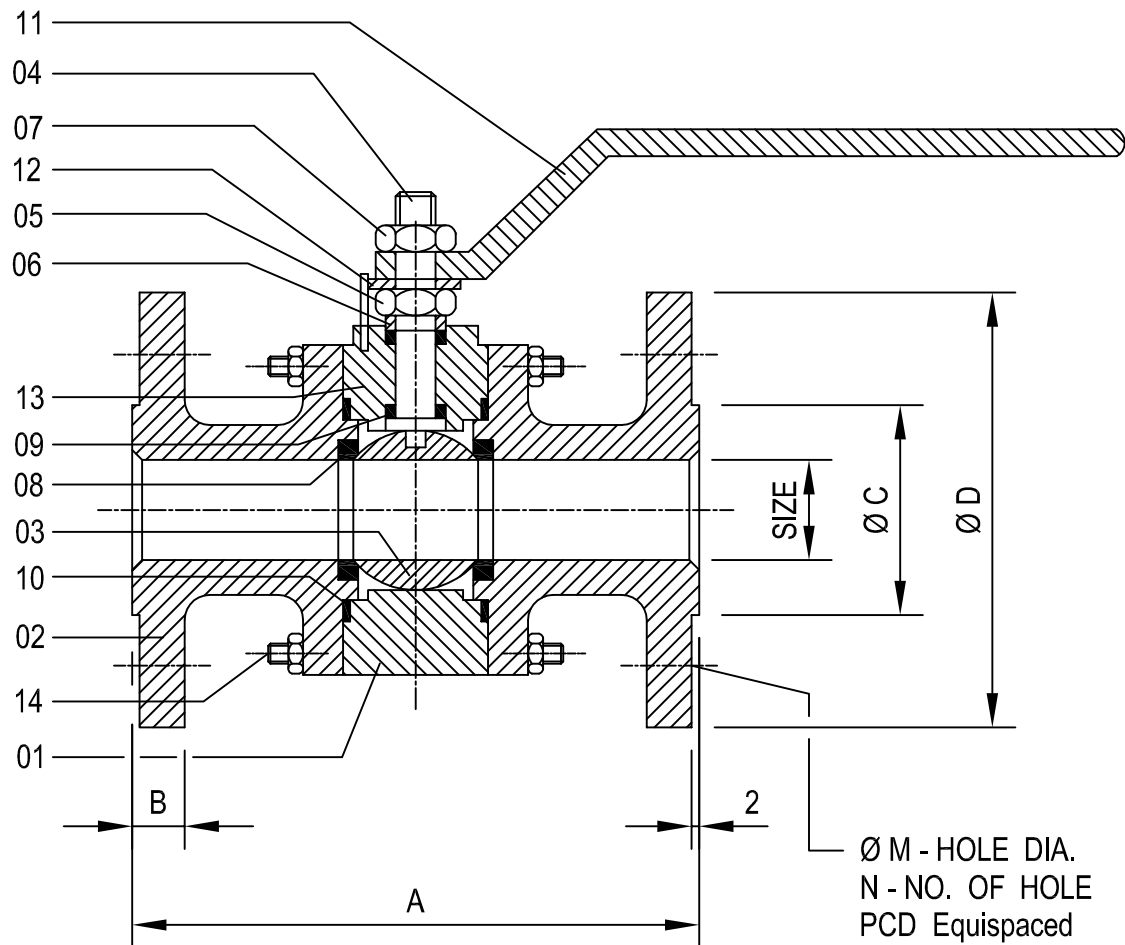

NOTE:- ALL DIM. ARE IN MM UNLESS OTHERWISE SPECIFIED.

CLASS - 150							
SIZE	A	B	Ø C	Ø D	Ø M	N	PCD
15	108	10.0	35	89.0	16	4	60.4
20	118	10.5	43	98.0	16	4	70.0
25	127	11.0	51	108.0	16	4	79.0
32	140	12.7	64	117.0	16	4	89.0
40	165	14.2	73	127.0	16	4	98.5
50	178	15.7	92	152.0	19	4	120.5
65	191	17.5	105	178.0	19	4	140.0
80	203	19.0	127	190.5	19	4	152.4
100	229	24.0	157	229.0	19	8	190.5
125	254	24.0	186	254.0	22	8	216.0
150	267	25.0	216	279.0	22	8	241.0
200	292	28.5	270	343.0	22	8	298.0
250	330	30.0	324	406.0	25	12	362.0

NO.	DESCRIPTION	MATERIAL	QTY.
01	BODY	C.I. / C.S. / S.S. 304 / S.S. 316	1
02	BODY CONNECTOR	C.I. / C.S. / S.S. 304 / S.S. 316	2
03	BALL	AISI 304 / AISI 316	1
04	STEM	AISI 304 / AISI 316	1
05	GLAND NUT	AISI 304 / AISI 316	1
06	GLAND BUSH	AISI 304 / AISI 316	1
07	LOCK NUT	AISI 304 / AISI 316	1
08	SEAT RING	PTFE	2
09	STEM SEAL	PTFE	2
10	BODY SEALENT RING	PTFE	2
11	WRENCH	C.S. / S.S.304 / S.S.316	1
12	STOP	C.S. / S.S.304 / S.S.316	1
13	STOPPER PIN	C.S. / S.S.304 / S.S.316	1
14	STUD & NUT	C.S. / S.S.	--

CONSTRUCTION:- 3 Pc. FULL BORE, BLOW-OUT PROOF STEM, FLOATING BALL. SOFT SEATED. BALL VALVE. ASA 150 CLASS

DESIGN & MFG. CODE	BS 5351/API 6 D
INSPECTION & TESTING	API 598
FACE TO FACE	ASME B 16.10
END CONNECTION	FLANGED AS PER ANSI B 16.5
P.O. NO.	—

HYDRO TEST PRESSURE	
SHELL	SEAT
32 KG/CM2	22 KG/CM2
AIR SEAT	6 KG/CM2

TITLE—		THREE PIECE BALL VALVE CLASS—150				
DRG. NO.		DV/BLV/150/01			SHEET 1 OF 1	
	DATE	MADE	CHKD.	APRD.	DESCRIPTION	REV.
		S.G.A	A.P.K	A.R.D		0
		<i>Dalsons Valves</i> D-58, MIDC MIRAJ BLOCK MIRAJ DIST- SANGLI (M.S) INDIA				