



**Model: JY-200T**

**Rating: 200 CWP**

**Design feature:**

- Applications for Hydraulic, Chemical, Steam, Oil/ Gas, Oxygen, Vacuum.
- Investment Cast Stainless Steel Body & Bonnet.
- Handle wheel operated.
- Non-rise stem, Wedge Disc.
- Integral Stainless Steel Seat.
- DIN EN10204-3.1 Certificate Available

**Specifications:**

- Flow bore: full port.
- Rating: 200 CWP
- Temperature: -20°C ~ 180°C
- Materials: ASTM A351 CF8M, 1.4408
- Size range: 1/2"~2"

**Standard:**


- Basic Design to ANSI B16.34
- Female Thread: NPT, PT, DIN 2999(Rp), ISO-228(G).
- Inspection & testing according to API 598.
- PED 97/23/EC; ISO 9001

**Dimensions List:**

Size	d	H	L	D	Weight (KG)
1/2"	15	95	55	70	0.48
3/4"	20	102	60	70	0.6
1"	25	115	65	80	0.8
1-1/4"	32	127	75	80	1.2
1-1/2"	38	150	85	90	1.6
2"	50	170	95	100	2.3

**Materials Specification :**

No	Parts Name	Specification
1	Body	CF8M/ 1.4408
2	Gasket	PTFE
3	Disc	SS316
4	Stem holder	SS316
5	Stem	SS316
6	Bonnet	CF8M/ 1.4408
7	Stem Packing	PTFE
8	Packing Gland	SS304
9	Packing Nut	SS316
10	Handlewheel	Mico Steel
11	Name Plate	Aluminum
12	Washer	SS304
13	Nut	SS304

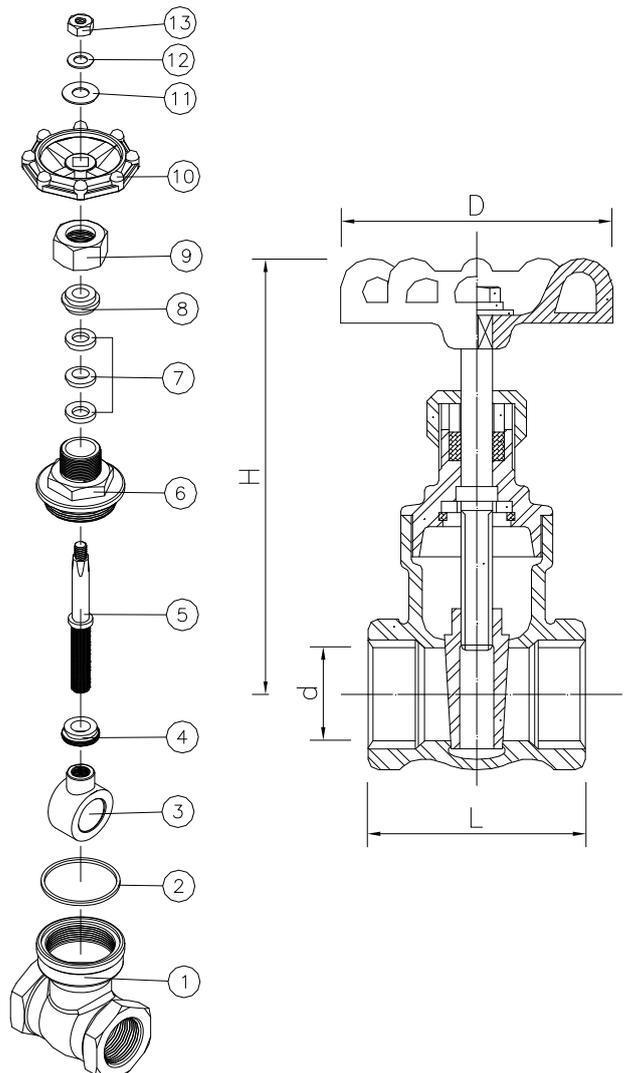

# Die Erste remains the right to adjust the spec of this model without further