



Model: JY-200S

Rating: 200 CWP

Design feature:

- Applications for Hydraulic, Chemical, Steam, Oil/ Gas, Oxygen, Vacuum.
- Investment Cast Stainless Steel Body & Bonnet.
- Screw-in Cover, Swing Type.
- For Horizontal or Vertical Line only.
- Integral Stainless Steel Seat.
- DIN 50049-3.1 Certificate Available

Specifications:


- Flow bore: full port.
- Rating: 200 CWP
- Temperature: -20°F ~ 400°F
- Materials: ASTM A351 CF8M, CF8, DIN 1.4408, 1.4308
- Size range: 3/8"~3"

Standard:

- Basic Design to ANSI B16.34
- Female Thread: NPT, PT, BSPP, BSPT, DIN 259/2999.
- Inspection & testing according to API 598.
- PED 97/23/EC; ISO 9001

Materials List:

No.	Part Name	Material
1	Body	ASTM A351 CF8M
2	Cover	ASTM A351 CF8M
3	Hanger Pin	SS316
4	Plug Gasket	PTFE
5	Plug	SS316
6	Disc	ASTM A351 CF8M
7	Gasket	PTFE

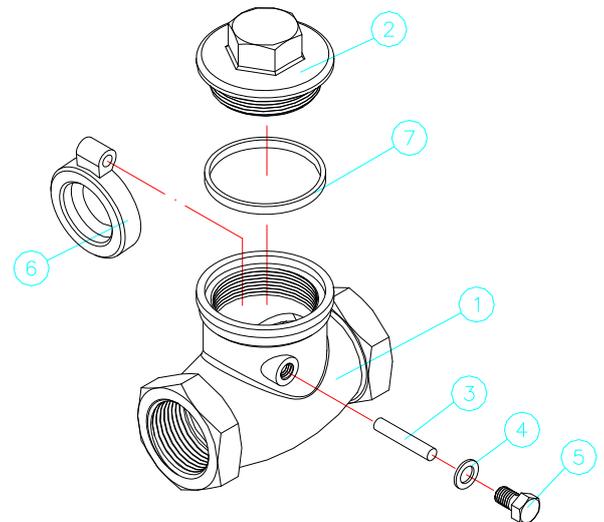

Dimension List:

Size	A	H	L	Weight (KG)
3/8"	13	45	65	0.35
1/2"	15	45	65	0.33
3/4"	20	56	80	0.42
1"	25	62	90	0.7
1-1/4"	32	72	105	1
1-1/2"	40	73	120	1.5
2"	50	82	140	2.1
2-1/2"	65	93	180	4.2
3"	80	104	200	5.5

